

(19) World Intellectual Property
Organization
International Bureau



05 JUL 2005 541434

(43) International Publication Date
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number
WO 2004/061793 A1

(51) International Patent Classification⁷: **G08B 29/18**,
29/14

(21) International Application Number:
PCT/GB2004/000004

(22) International Filing Date: 5 January 2004 (05.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0300094.0 3 January 2003 (03.01.2003) GB

(71) Applicant (for all designated States except US): **APOLLO
FIRE DETECTORS LIMITED** [GB/GB]; 36 Brookside
Road, Havant, Hampshire PO9 1JR (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BARRETT, Roger**

[GB/GB]; Apollo Fire Detectors Limited, 36 Brookside
Road, Havant, Hampshire PO9 1JR (GB). **CUTLER, Jef-
frey, John** [GB/GB]; Apollo Fire Detectors Limited, 36
Brookside Road, Havant, Hampshire PO9 1JR (GB).

(74) Agents: **MOIR, Michael, Christopher** et al.; Mathys &
Squire, 100 Grays Inn Road, London WC1X 8AL (GB).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: **HAZARD DETECTOR**

FLOWCHART OF SMOKE DETECTOR OPERATION FROM COLD START OR RESET

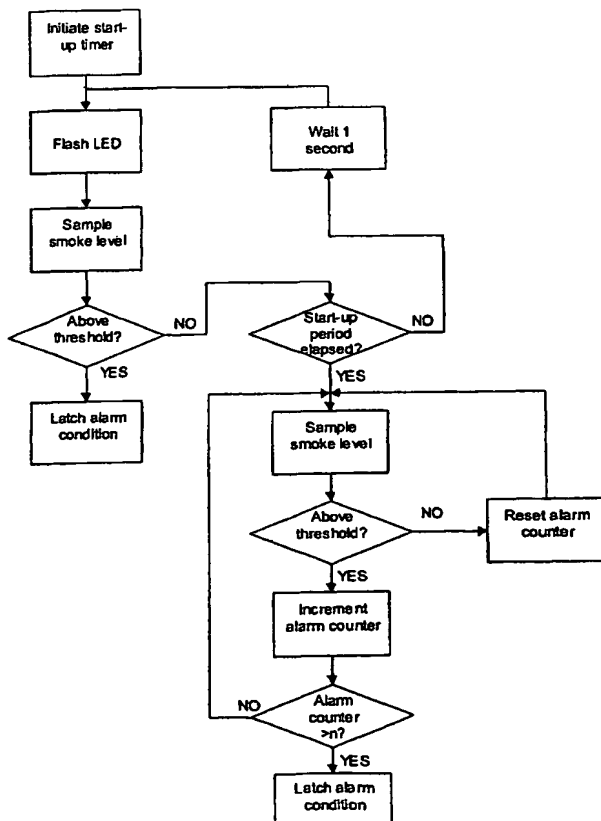

(57) Abstract: A hazard detector has an electronic circuit with a start-up program for causing emission of a local indicator signal, such as a flashing signal from a LED, if power and ground terminals of the detector are connected with proper orientation, i.e. polarity, to power and ground lines of a power supply. Through this means, a person installing the hazard detector can tell immediately after connection if the detector has been connected with proper orientation, and avoids the need for introducing a hazard such as heat or smoke to test the operation of the detector. A variation uses a more sophisticated program that disables, during a test mode, complex filtering algorithms that are used by detectors to block false alarm signals; if such filtering is not disabled, impedes normal testing of the detectors.

WO 2004/061793 A1



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HAZARD DETECTOR

Background of the Invention

The present invention relates to a hazard detector, and more particularly, in one form to a fire-hazard detector that includes protection against incorrect installation, and/or
5 for which in-situ testing is facilitated. In another form, the invention is applicable to a hazard detector the operation of which can be modified when it is in a test mode. The invention is applicable to detectors sensitive to other hazards, e.g. (without limitation) toxic gas, radiation or
10 intruders. The term 'hazard detector' thus is to be construed accordingly.

Conventional fire detectors are normally used in simple two-wire circuits powered by a battery or other secure DC supply. When in a stand-by mode, such detectors present a
15 high resistance between the two circuit wires and draw a negligible current from the battery, whereas in an alarm mode they introduce a low resistance across the two circuit wires. The high resistance presented during the stand-by mode normally makes it impossible during that mode to monitor the
20 presence of such a detector on a two-wire circuit. Therefore, to ensure that such fire detectors will operate properly in the alarm mode, it becomes important to determine that they are correctly connected, and regular testing is required.

25 Some detectors are made insensitive to the polarity of the power supply so as to simplify their installation and

avoid problems that occur when a polarity-sensitive device is installed improperly. One way to make a detector insensitive to power-supply polarity is to introduce a diode bridge; this is illustrated in Figure 1. The drawback with
5 this arrangement is two-fold; it adds cost, and it increases the minimum operating voltage of the detector significantly due to the voltage drop across the diode bridge.

If a diode bridge or another circuit is not introduced to make the detector insensitive to power-supply polarity,
10 then it becomes necessary to protect the electronic circuit in the detector against a reverse-polarity connection in some other way. This is normally achieved by adding to the detector a diode in parallel with the electronic circuit of the detector and in reverse polarity across the power supply
15 when the detector is properly connected; this is illustrated in Figure 2. If the detector happens to be connected in a reverse fashion across the power supply, the diode will also be connected in the wrong direction, which will result in a short-circuit being presented to the control panel,
20 indicating a wiring fault. While this arrangement may be acceptable for many control panels, there are some panels in which a momentary reversal of the power supply is used as part of a line-monitoring system; in such control panels, a short-circuit caused by polarity reversal is not acceptable.

25 An alternative method of protecting the electronic circuit of a detector against reverse polarity is the inclusion in the detector of a blocking diode in series with the other electronic circuitry of the detector; one embodiment of this

is illustrated in Figure 3. This method will operate on all known systems. However, it has the disadvantage that an inadvertent reverse connection will not result in a fault condition being shown at the control panel. To verify
5 correct connection it is necessary to initiate an alarm condition in the detector, either by using smoke or other appropriate stimulus or by using a special test facility. This is inconvenient in that the alarm condition will be registered by the control panel, which may cause an audible
10 alarm to sound or other action to be taken (such as an automatic call to a fire department).

Summary of the Invention

It is an object of at least the preferred embodiments of the invention to provide a detector in which at least some of
15 the foregoing disadvantages are alleviated.

In one aspect the invention provides a hazard detector comprising means for detecting a hazardous condition and for indicating an alarm upon such detection, and means for modifying the behaviour of the detector during a start-up or
20 test mode to facilitate commissioning or testing of the detector. The hazardous condition may be a hazardous smoke level, or may be a hazardous rate of temperature rise. The hazardous rate of temperature rise may be a rate of temperature rise that is equal to, or exceeds, approximately
25 five degrees over a period of thirty seconds.

The modifying means may be a means for filtering out transient detections of the hazardous condition during a

normal state of operation and means for disabling the filtering means during the start-up or test mode. The filtering-out of transients can reduce the number of false alarms.

5 Preferably, the detector is for connection between positive and negative power lines, the detector having a positive terminal and a negative terminal and being adapted, upon application of power to the power lines, to emit a local indicator signal if the positive and negative terminals of
10 the detector have a correct polarity orientation to the positive and negative lines.

 In another aspect the invention is a hazard detector for connection between positive and negative power lines, the detector having a positive terminal and a negative terminal
15 and being adapted, immediately following application of power to the power lines, to emit a local indicator signal if the positive and negative terminals of the detector have a correct polarity orientation to the positive and negative lines.

20 Preferably, the detector includes an electronic circuit serially-connected to a blocking diode, the blocking diode being connected to either the positive or negative terminal. Preferably, the indicator signal is a light signal. More preferably, the indicator signal is a flashing light signal
25 with repetitive on/off cycle, the period of which may be approximately one second.

 The flashing light signal may be produced by a light-emitting diode (LED) that forms part of the electronic

circuit. Preferably, the LED emits red light.

Preferably, the detector is in a test mode when it is emitting the local indicator signal.

Brief Description of the Drawings

5 Preferred features of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic illustration of a hazard detector that uses a diode bridge for polarity protection;

10 Figure 2 is a schematic illustration of a hazard detector that uses a shunt diode for polarity protection;

Figure 3 is a schematic illustration of a hazard detector that uses a series diode for polarity protection;

15 Figure 4 illustrates a sequence of output operations of a hazard detector in a first embodiment of the subject invention;

Figure 5 illustrates a sequence of output operations of a hazard detector in a second embodiment of the subject invention;

20 Figure 6 is a flowchart of the operation of the hazard detector in a first form of the second embodiment, the first form being a smoke detector that measures smoke level; and,

Figure 7 is a flowchart of the operation of the hazard detector in a second form of the second embodiment, the 25 second form being a heat detector that measures a rate of temperature rise.

Detailed Description of Preferred Embodiments

The subject invention involves a hazard detector of the type which uses a series diode for polarity protection, as previously discussed with respect to Figure 3. However, the two embodiments that are described additionally include a light-emitting diode (LED) as well as a suitably-programmed ROM or EPROM to cause the LED to perform in a manner to be described.

In the first embodiment, when a hazard detector 10 of the subject invention is initially connected to a power supply, current only flows through a detector electronic circuit 12 (see Figure 3) if the detector 10 is connected to the power supply in a proper orientation (polarity); if the detector 10 is connected with reverse orientation, a series diode 14 prevents current from flowing through circuit 12. The series diode 14 is shown connected to the positive terminal of circuit 12, but it could instead be connected to the negative terminal. If the detector 10 is connected with proper orientation, the circuit 12 becomes powered-up (a "cold start" not involving additional external circuitry), and an internal program in a ROM or EPROM (not shown) of circuit 12 automatically begins execution of a start-up program. The start-up program causes a LED (not shown) connected to circuit 12 to flash on/off for about four minutes at a rate of approximately once per second. Both the rate and length of the flashing are adjustable and controlled by a processor or by a separate timing subcircuit of circuit 12. A person connecting the detector of the invention to the

power supply is immediately able to tell, by observing if the LED is flashing, whether the detector is connected with proper orientation. The LED operation following proper connection is illustrated in Figure 4.

5 After correct installation, the flashing ability of the detector may be utilized in a further way, namely, to assist with locating a power-supply wiring fault. If an open-circuit fault occurs at an unknown location on the power-supply wiring, the power supply is temporarily disconnected.
10 After reconnection, only those detectors that are located between a control panel and the fault location will begin to flash. The location of the fault can thereby be detected without requiring any of the detectors to be removed or any special test meter to be connected; in effect, the detectors
15 act together as a test meter.

 A second embodiment, illustrated in Figures 5, 6 and 7, facilitates in-situ testing by removing transient filtering of input signals during a test mode. Figure 6 indicates a situation where a hazardous condition being measured relates
20 to smoke level, and Figure 7 indicates a situation where a hazardous condition being measured relates to a rate of rise in temperature. In order to reduce the cost and inconvenience of false alarms, there has developed a trend towards more complex signal processing of the signals input
25 to hazard detectors. One known technique is to include signal filtering to reject transient signals. An unfortunate side effect of such filtering is that it tends to cause a rejection of signals produced by normal testing tools, making

in-situ testing of detectors very difficult.

The second embodiment includes the flashing LED test program for polarity orientation of the first embodiment, but adds an additional program to address the problem caused by the presence of the complex signal processing mentioned above. The additional program disables or bypasses those parts of operating algorithms that function as the filters for reducing false alarms; the basic sensitivity of the detector is not affected by such disabling of the filter. The test mode in the second embodiment is initiated by disconnecting the detector from the power supply. This can be performed from the control panel for all detectors of the system by using the panel's reset facility, or alternatively, each detector can be briefly individually disconnected from, and reconnected to, the power supply.

Most use for the test mode of the second embodiment would come with control panels that include what is termed in the field a special "walk test" mode. When set to the "walk test" mode, the controller allows an engineer to trigger an alarm on a detector by, for example, using artificial smoke or a rapid rise in temperature, and to then see from the permanently-lit alarm LED that the control panel has accepted the alarm. After the alarm has been activated, the control panel automatically resets the detector by briefly interrupting the power supply to the zone in which the alarm is situated. Each reset process simultaneously performs a cold start on all of the detectors in the zone, thereby maintaining them in the test state. At the completion of

testing, the control panel is returned to normal operation and after completing its start-up program, the internal processor in each detector operates that detector in its normal monitoring state, i.e. the LED no longer flashes, the
5 transient filtering has been enabled, and the detector is alert to its selected hazard.

It will be appreciated that if preferred the detector can incorporate the filtering-disablement feature without the flashing LED. For example, the filtering could be disabled
10 by a switch manually operated by a maintenance technician when in-situ testing is required.

Although it is known for some conventional detectors to utilize a LED on a flash cycle, those LEDs operate continuously as long as the power supply is connected; they
15 are not used, as in the subject invention, to indicate that a detector has been connected with proper orientation to a power supply. At least in Germany, the type of detector LED that continues to display a flashing signal as long as power is connected must not be coloured red. However, use of red-
20 coloured LEDs are allowed if their flashing corresponds to a "special mode of operation"; the temporary flashing during the start-up of the detector of this invention qualifies as such a special mode.

The detection of rate of rise of temperature, as
25 illustrated in Figure 7, is an advance on the detection of a pre-set limit for temperature ('fixed temperature' detection). Measurement of the rate of rise of temperature may result in an alarm being signalled before a pre-set

temperature has been reached, thus providing an earlier warning of a serious fire condition than fixed temperature detection. Fixed-temperature detectors are used in environments in which in which rapid changes in temperature are normal. Such applications include kitchens and boiler rooms. Fixed-temperature detectors often have pre-set alarm temperatures of 100°C or more. Such detectors can be very difficult to test because their sensing elements must be heated to above their alarm temperature before any response occurs. The energy input required for such testing is difficult to achieve with a portable in-situ tester.

In the arrangement illustrated in Figure 7 the detector runs a special test algorithm during the start-up period. This algorithm causes the detector to signal an alarm if an abnormal rate of temperature rise is sensed, regardless of the absolute temperature. For example, a rate of temperature rise that is equal to, or exceeds, approximately 5 degrees Centigrade over a period of 30 seconds might be used. Such a rate of temperature rise is unlikely to be caused by normal ambient variations occurring during the start-up period but can safely be used as an indication that the detector is operating correctly.

While the present invention has been described in its preferred embodiments, it is to be understood that the words which have been used are words of description rather than limitation, and that changes may be made to the invention without departing from its scope as defined by the appended claims.

Each feature disclosed in this specification (which term includes the claims) and/or shown in the drawings may be incorporated in the invention independently of other disclosed and/or illustrated features.

5 The text of the abstract filed herewith is repeated here as part of the specification.

 A hazard detector has an electronic circuit with a start-up program for causing emission of a local indicator signal, such as a flashing signal from a LED, if power and
10 ground terminals of the detector are connected with proper orientation, i.e. polarity, to power and ground lines of a power supply. Through this means, a person installing the hazard detector can tell immediately after connection if the detector has been connected with proper orientation, and
15 avoids the need for introducing a hazard such as heat or smoke to test the operation of the detector. A variation uses a more sophisticated program that disables, during a test mode, complex filtering algorithms that are used by detectors to block false alarm signals; if such filtering is
20 not disabled, it impedes normal testing of the detectors.

CLAIMS:

1. A hazard detector comprising means for detecting a hazardous condition and for indicating an alarm upon such detection, and means for modifying the behaviour of the detector during a start-up or test-mode to facilitate commissioning or testing of the detector.

2. The detector of claim 1, wherein the hazardous condition is a hazardous smoke level.

3. The detector of claim 1, wherein the hazardous condition is a hazardous rate of rise in temperature.

4. The detector of claim 3, wherein the hazardous rate of rise in temperature is a rate of temperature rise that is equal to, or exceeds, approximately five degrees over a period of thirty seconds.

5. The detector of any of claims 1 to 4, comprising means for filtering-out transient detections of the hazardous condition during a normal state of operation, the modifying means comprising means for disabling the filtering means during the start-up or test mode.

6. The detector of any of claims 1 to 5, being for connection between positive and negative power lines, the detector having a positive terminal and a negative terminal

and being adapted, upon application of power to the power lines, to emit a local indicator signal if the positive and negative terminals of the detector have a correct polarity orientation to the positive and negative lines.

7. A hazard detector for connection between positive and negative power lines, the detector having a positive terminal and a negative terminal and being adapted, upon application of power to the power lines, to emit a local indicator signal if the positive and negative terminals of the detector have a correct polarity orientation to the positive and negative lines.

8. The detector of claim 6 or 7, comprising an electronic circuit serially-connected to a blocking diode, the blocking diode being connected to either the positive or negative terminal.

9. The detector of claim 6, 7 or 8, wherein the indicator signal is a light signal.

10. The detector of claim 9, wherein the indicator signal is a flashing light signal with repetitive on/off cycle.

11. The detector of claim 10, wherein the period of the on/off cycle is approximately one second.

12. The detector of claim 10 or 11, wherein the flashing light signal is produced by a light-emitting diode (LED) that forms part of the electronic circuit.

13. The detector of claim 12, wherein the LED is red-coloured.

14. The detector of any of claims 6 to 13, wherein the detector is in a test mode when it is emitting the local indicator signal.

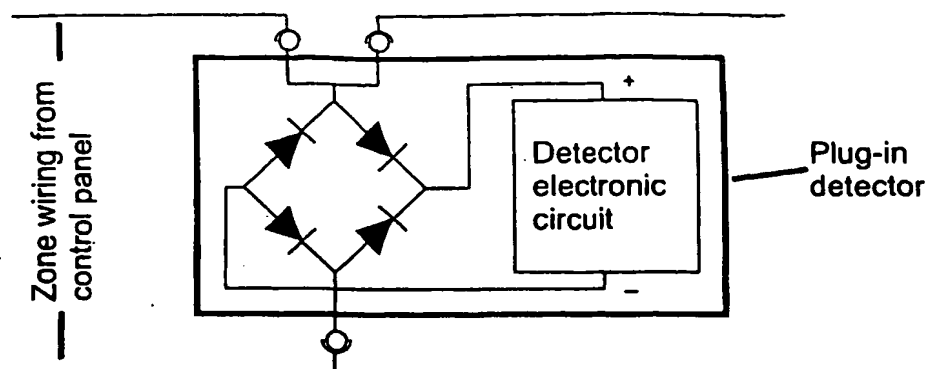


Fig 1 Polarity protection using diode bridge

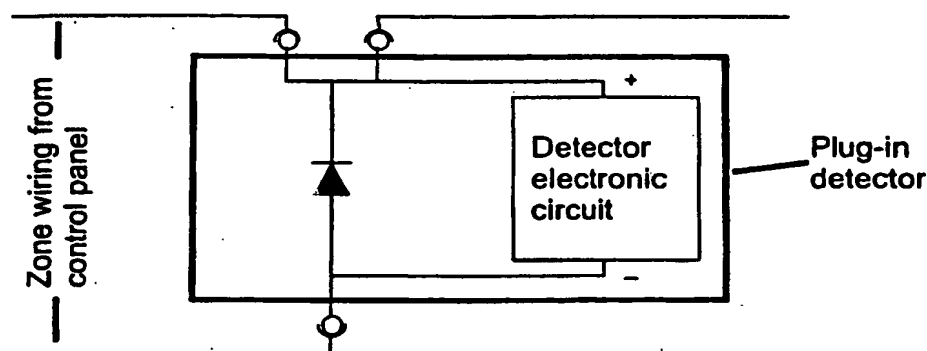


Fig 2 Polarity protection using shunt diode

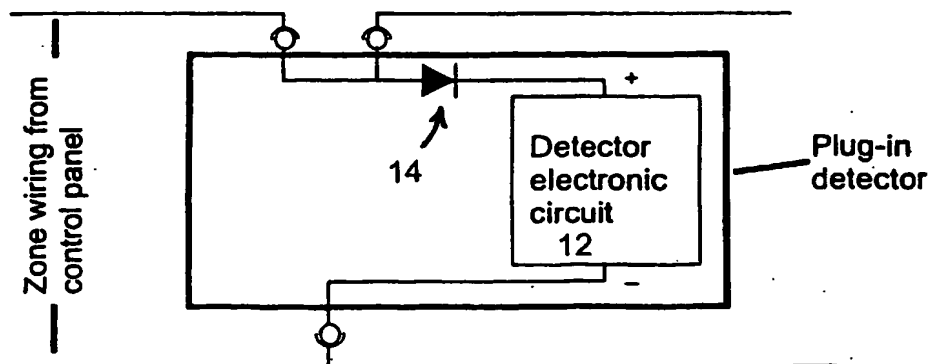


Fig 3 Polarity protection using series diode

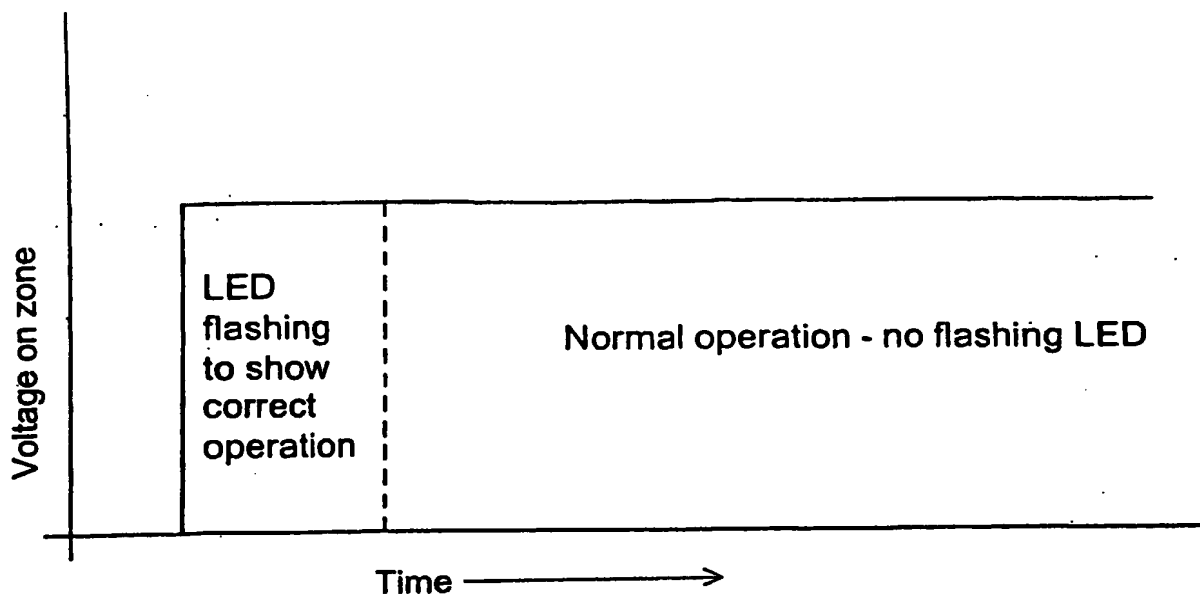


Fig 4 Flashing LED on power-up



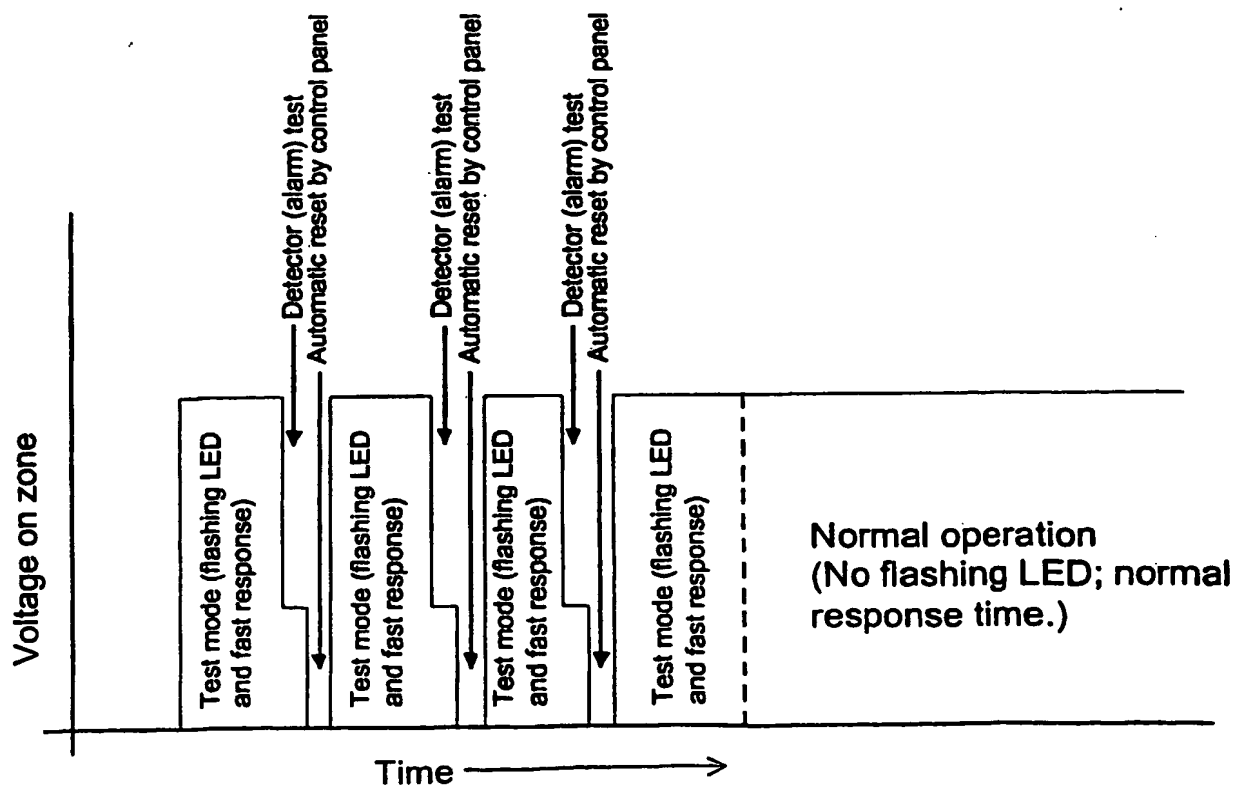


Fig 5 Special test mode on power-up

Fig 6

Flowchart of smoke detector operation from cold start or reset

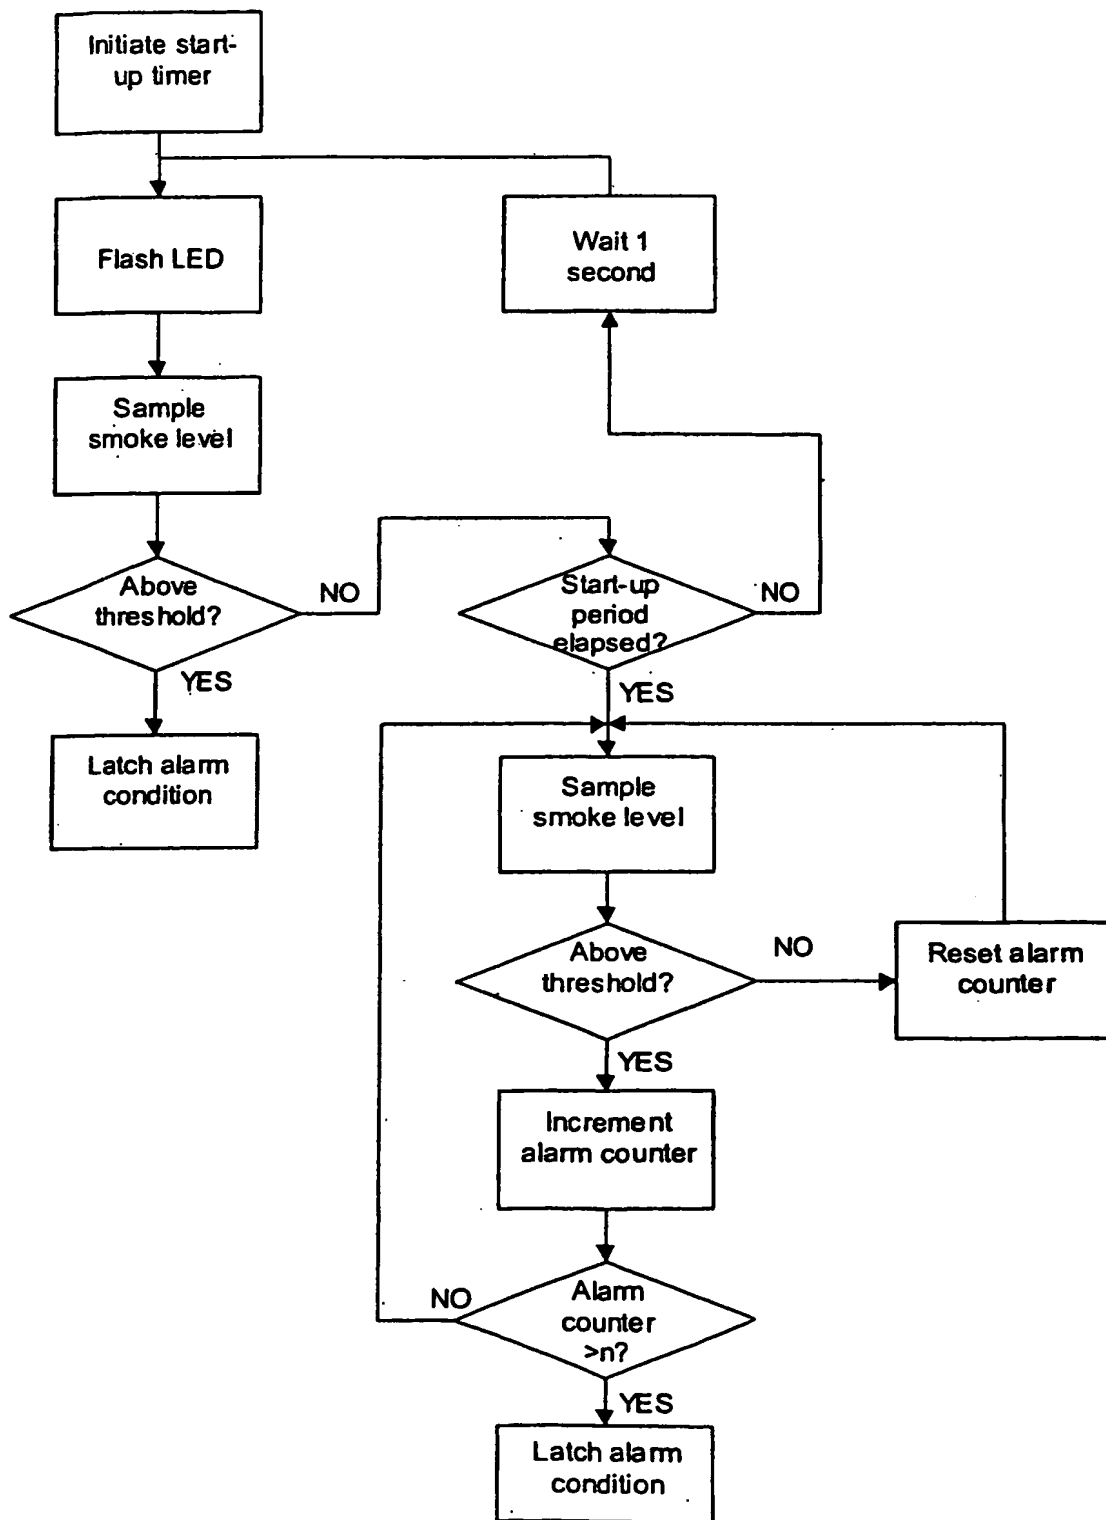

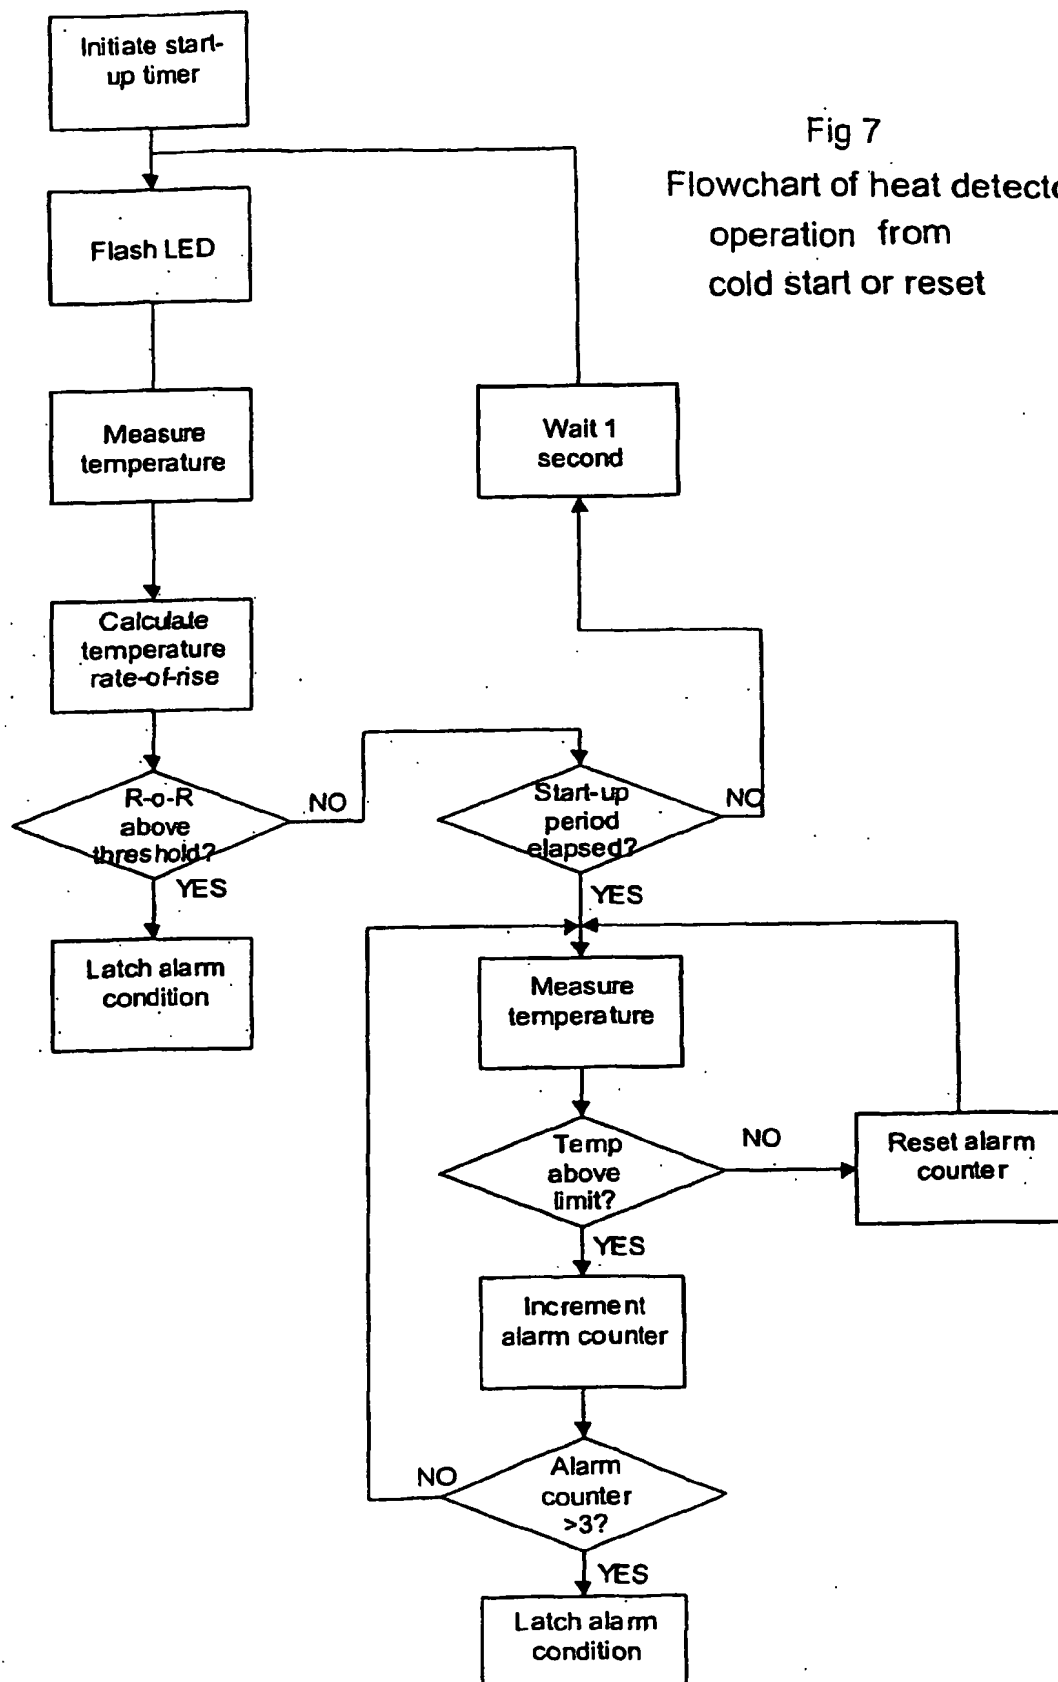

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB2004/000004

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G08B29/18 G08B29/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08B H02H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X | US 5 716 725 A (RIVERON MARIO A ET AL) 10 February 1998 (1998-02-10) the whole document | 7-9 |
| A | | 1, 6 |
| X | GB 2 137 790 A (MORRISON JOHN M) 10 October 1984 (1984-10-10) page 1, line 73 - line 98 page 2, line 35 - line 52 | 1 |
| X | US 5 966 079 A (TANGUAY WILLIAM P) 12 October 1999 (1999-10-12) figure 24 | 1 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

12 May 2004

Date of mailing of the international search report

25/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De la Cruz Valera, D

INTERNATIONAL SEARCH REPORT

International Application No. PCT/GB2004 /000004

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-6

Means for modifying the behaviour of a hazard detector during test mode or start up

1.1. claims: 7-14

Hazar detector with correct polarity connection indication means

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB2004/000004

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| US 5716725 | A | 10-02-1998 | NONE | |
| GB 2137790 | A | 10-10-1984 | NONE | |
| US 5966079 | A | 12-10-1999 | US 5969600 A | 19-10-1999 |
| | | | US 5966078 A | 12-10-1999 |
| | | | US 5886638 A | 23-03-1999 |
| | | | US 5912626 A | 15-06-1999 |
| | | | US 5896091 A | 20-04-1999 |